


The Omachron Bathroom Timer is a low cost, microprocessor-controlled timer. The timer operates on 24VAC and provides a 24VAC signal while the timer is counting down to zero.



Features

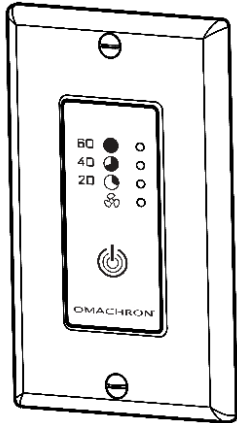


- 24VAC operation for compatibility with HVAC and Fan Coil System
- Microprocessor controlled for consistent and reliable operation
- Simple three wire connection (RH - 24VAC, RC - Common and SIG - Signal)
- Single button operation. Each press adds an additional 20 minutes of signal to a maximum of 60 minutes. Holding the button cancels the remaining time)
- Three-time remaining status LED and one operating/standby LED
- Standard “Decora™ style” faceplate (not included)
- 24VAC operation for compatibility with HVAC and Fan Coil System

Specifications

Operating temperature	-5°C to 40°C (non-condensing)
Storage temperature	-10°C to 60°C
Supply power required	24VAC 60Hz nominal, <8mA typical
Output power	24VAC 60Hz nominal, 100mA maximum
Electrical Protection	Self-resetting polyfuse

Mechanical

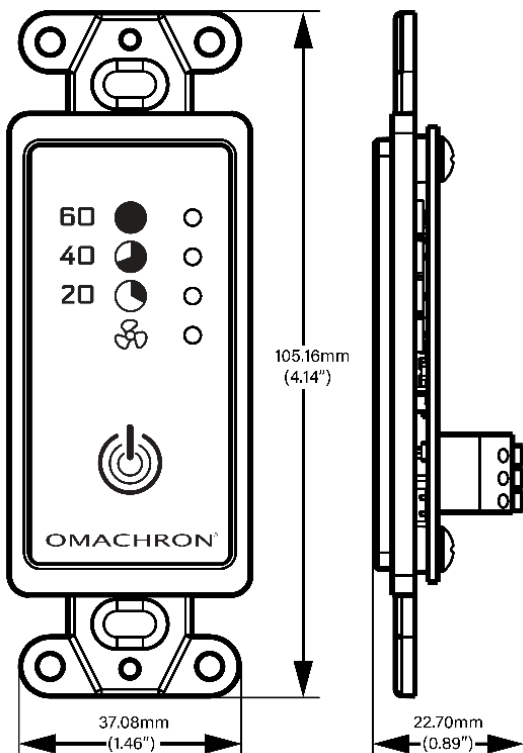

Dimensions	4.14" x 1.46 x 2.3" x 0.9"
(L x W x H)	105mm x 37mm x 22mm
Connection Wire	16-24 AWG
Weight	23g not including leads