


The Omachron Bathroom Timer is a low-cost, microprocessor-controlled timer. The timer operates on 24VAC and provides a 24VAC signal while the timer is counting down to zero.



Features

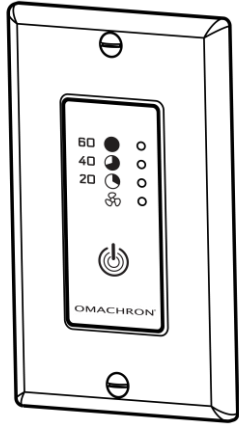


- 24VAC operation for compatibility with HVAC and Fan Coil Systems.
- Microprocessor-controlled for consistent and reliable operation.
- Simple three-wire connection (RH - 24VAC, RC - Common and SIG - Signal).
- Single button operation. Each press adds an additional 20 minutes of signal to a maximum of 60 minutes. Holding the button cancels the remaining time).
- Three “time remaining” status LEDs and one operating/standby LED.
- Standard “Decora™ style” faceplate (not included).

Specifications

| | |
|-----------------------|-----------------------------------|
| Operating temperature | -5°C to 40°C (non-condensing) |
| Storage temperature | -10°C to 60°C |
| Supply power required | 24VAC 60Hz nominal, <8mA typical |
| Output power | 24VAC 60Hz nominal, 100mA maximum |
| Electrical Protection | Self-resetting polyfuse |

Mechanical

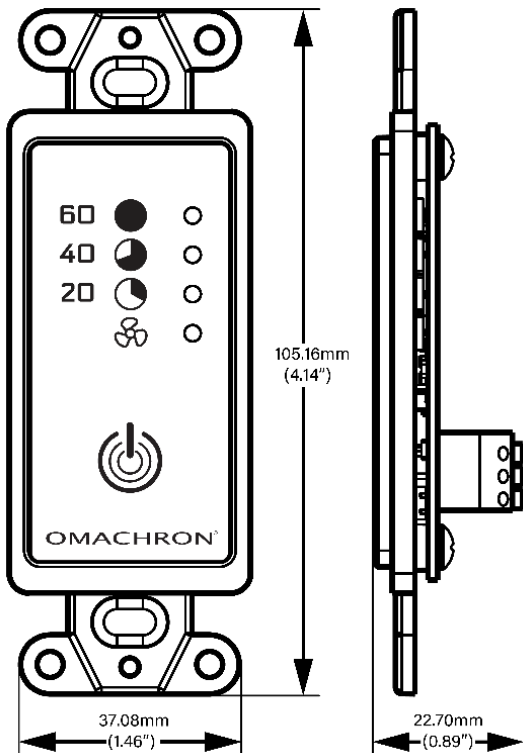

| | |
|--------------------|------------------------------|
| Overall Dimensions | 4.14" x 1.46" x 0.89" |
| (L x W x H) | 105.16mm x 37.08mm x 22.70mm |
| Connection Wire | 16-24 AWG |
| Weight | 23g not including leads |